



ULTRA SCANNER

SOMETHINGS MAY BE NEGLECTED BUT
PUBLIC SECURITY ...NEVER!

Security is becoming even more important in today's public life. Therefore, security solutions are needed in almost every part of our daily life.

Ultra Scanner, with its ultimate sensitivity, fast response time, light and ergonomic design is the most ideal hand-held detector for ultra safety and security.


Features:

- 360° Detection Sensor
- Audio or Vibration Alert
- Adjustable Sensitivity
- Instant Interference Elimination
- Signal Level Indicator
- Long Battery Life
- Low Battery LED



Applications:

- Airports
- Shopping Malls
- Government Offices
- Schools
- Police Stations
- Military Areas
- Courthouses
- Prisons
- Stadiums and Concert Halls
- Public Meeting &
- Demonstration Areas
- Transportation Terminals
- Corporate Security
- Building Complexes
- Trade & Business Centers
- and many more...

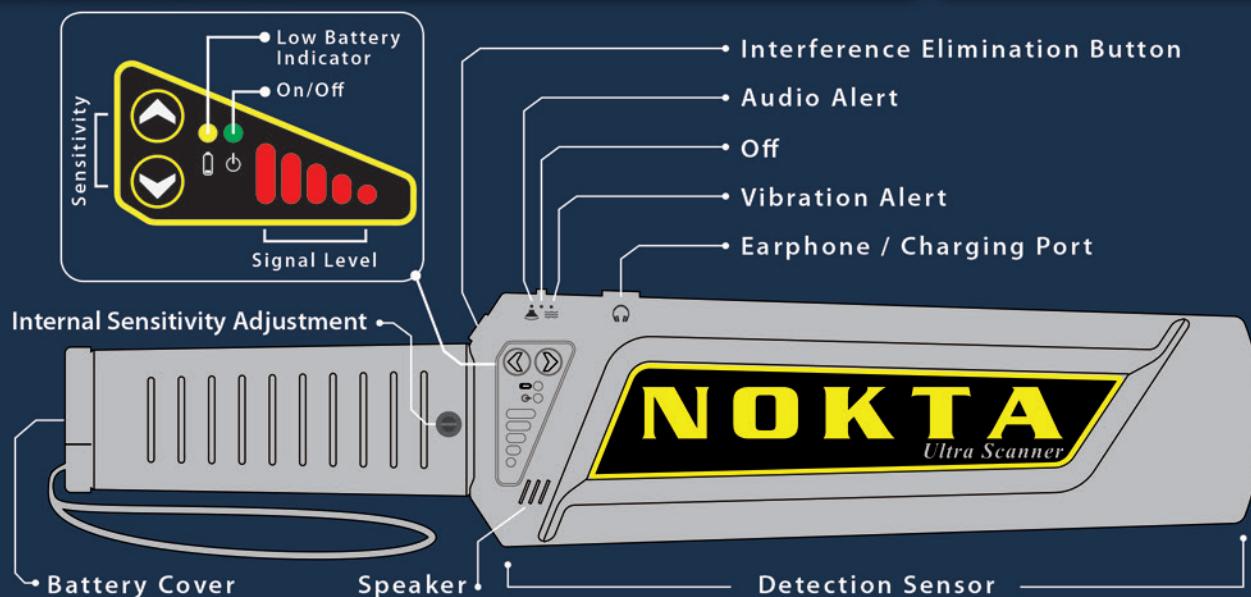

	<i>Ultra Scanner Standard</i>	<i>Ultra Scanner Pro Package</i>
Sensitivity Adjustment	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Interference Elimination Button	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Internal Sensitivity Adjustment	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
LED Indicator	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Volume Control	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Earphone / Charger Port	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Package Content:	9V Alkaline Battery Belt Holster	9V Rechargeable Battery & Charger, Earphone Belt Holster, Carrying Bag

Technical Specifications

- | | |
|--|--|
| ► Audio Frequency : 2KHz | ► Weight : 400Gr. (14.1 oz.) |
| ► Operating Frequency : 50KHz | ► Operating Temperature : -20°C (-4°F) to 60°C (140°F) |
| ► Voltage : 6V - 10.5V | ► Humidity : 95% |
| ► Current : 4.5mA (standby) | ► Battery : 9V Alkaline |
| ► Dimensions (LxWxD) : 40x8.5x3cm. (15.7"x3.3"x1.2") | ► Battery Life : Up to 100 hours |

Nokta Detectors reserves the right to change the design, specifications or accessories without notice and without any obligation or liability whatsoever.

Nokta
DETECTION TECHNOLOGIES

Emek Mah. Sivat Cad. Sakız Sok. No:4 Sancaktepe - İstanbul/Turkey

Phone: 0090 (216) 415 56 86 Fax: 0090 (216) 415 63 43

E-mail: info@noktadetectors.com Web: www.noktadetectors.com